




An
Employee
Owned
Company

30, 80-Gallon & Base-Mount Air Compressors

Two Stage — Gasoline

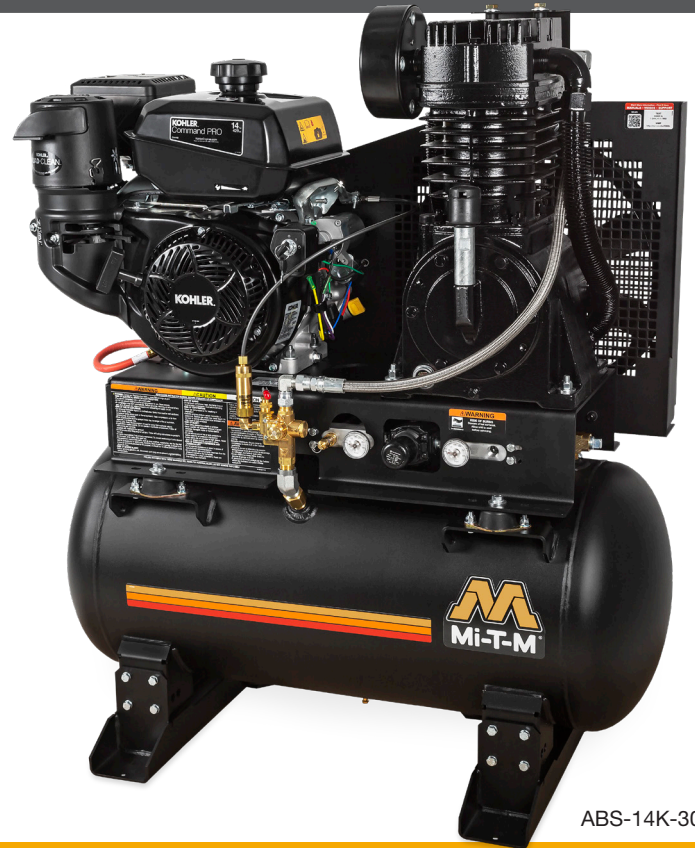

ABS-14K-30H

Commonly used for industrial and automotive applications, these air compressors can be mounted in the back of a trailer or service truck to take to the most demanding jobsites.

COMPRESSOR PUMP

- Cast iron compressor pump
- Splash lubricated
- Stainless-steel braided discharge hose
- Large canister intake filter
- Oil level sight indicator

ENGINE

- Electric start – battery and cables not included
(Battery tray, box and cables are standard on ABS-14V-30H)

FRAME

- Powder coated ASME receiver tank (Tank-mount models)
- $\frac{3}{16}$ -inch base plate to reduce vibration
- Powder coated two-piece belt guard

- Removable base plate offers flexible installation

COMPONENTS

- Regulator and two gauges for tank and outlet pressure
- ASME safety valves
- 16½-inch fly wheel
- Tank drain valve
- Service truck mount kit (Standard on base-mount models)

LIMITED WARRANTY

- 3 year engine

CERTIFICATIONS

- ASME Boiler and Pressure Vessel Code – UM (30-gallon models)
- ASME Boiler and Pressure Vessel Code – U (80-gallon models)



30, 80-Gallon & Base-Mount Air Compressors – Two Stage – Gasoline

TANK-MOUNT MODELS

MODEL NUMBER	CFM @ PSI*	DISPLACEMENT/ENGINE	TANK SIZE	ENGINE IDLE CONTROL	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
ABS-13H-30H	29.0 @ 175	389cc Honda GX390 OHV	30-gallon	Pneumatic	38x23x46in.	480 lb.	416 lb.
ABS-14K-30H	29.0 @ 175	429cc Kohler CH440 OHV	30-gallon	Cable throttle	38x23x46in.	480 lb.	416 lb.
ABS-14M-30H	29.0 @ 175	420cc Mi-T-M OHV	30-gallon	Pneumatic	38x23x46in.	480 lb.	416 lb.
ABS-14V-30H	29.0 @ 175	408cc Vanguard OHV	30-gallon	Cable throttle	40.5x23x46	540 lb.	476 lb.
ABS-13H-80H	29.0 @ 175	389cc Honda GX390 OHV	80-gallon	Pneumatic	52x26.5x53in.	560 lb.	496 lb.
ABS-14M-80H	29.0 @ 175	420cc Mi-T-M OHV	80-gallon	Pneumatic	52x26.5x53in.	560 lb.	496 lb.

BASE-MOUNT MODELS

MODEL NUMBER	CFM @ PSI*	DISPLACEMENT/ENGINE	TANK SIZE	ENGINE IDLE CONTROL	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
ABS-13H-B	29.0 @ 175	389cc Honda GX390 OHV	Base-mount	Pneumatic	36.5x19x28in.	279 lb.	215 lb.
ABS-14M-B	29.0 @ 175	420cc Mi-T-M OHV	Base-mount	Pneumatic	36.5x19x28in.	279 lb.	215 lb.

*Equipped with 150-PSI maximum rated regulator.

ACCESSORY:

PART NUMBER	DESCRIPTION	FITS MODELS
AW-6000-1002	Equipment cover – Keeps your equipment clean, dry and looking like new	30-gallon & base-mount models

OPTIONS:

PART NUMBER	DESCRIPTION	FITS MODELS
AX-0017	Battery, battery tray, box and 2-foot of cables – Attaches to engine side of unit	30 & 80-gallon models
AX-0077	Battery tray, box and 2-foot of cables – Attaches to engine side of unit	30 & 80-gallon models
IX-0001	Vibration isolator pads – Recommended for models mounted in service truck applications. Isolators protect the unit from vibration during use.	30 & 80-gallon models
IX-0055	Remote start/choke – 7-foot wire extension for key switch	Honda engine models
IX-0059	Remote start/choke, sealed cable – 7-foot wire extension for key switch	Honda engine models
IX-0067	Remote start/choke, sealed cable – 7-foot wire extension for key switch	Mi-T-M engine models

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov.